
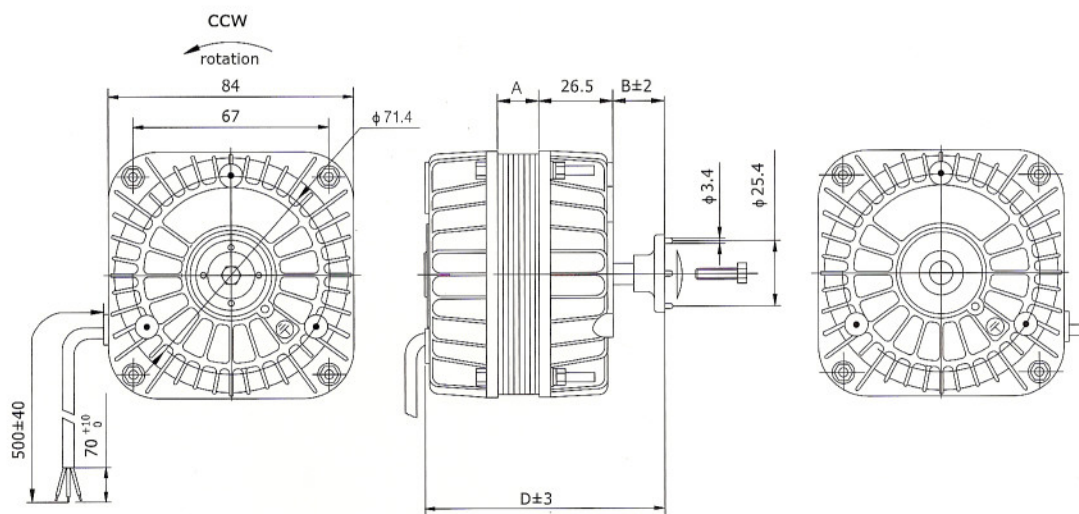

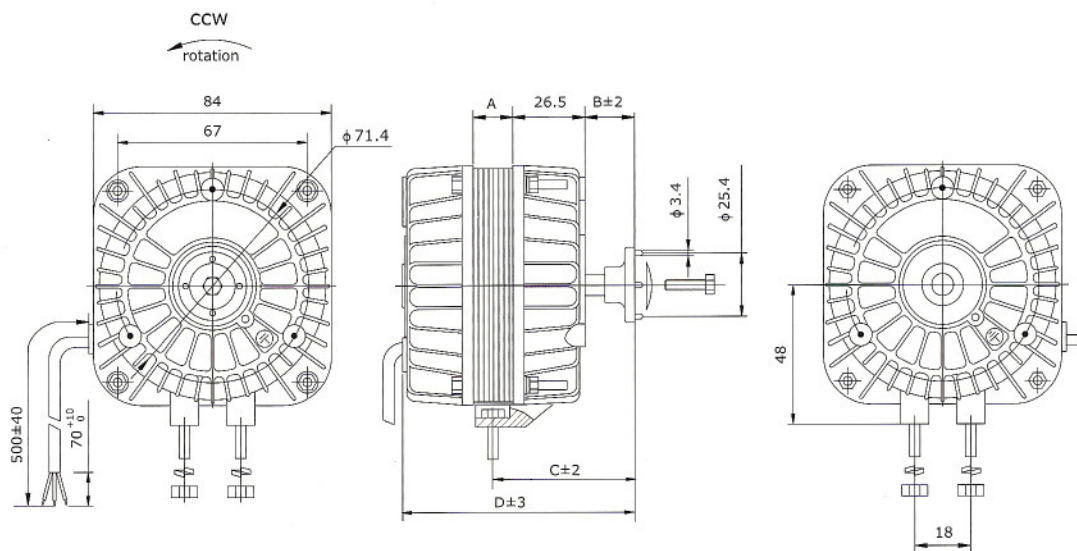


YZF **00** Series Shaded Pole MotorsYZF **00** 系列罩极电机



MODEL 型号	VOLTAGE 额定电压 V	FREQUENCY 额定频率 Hz	INPUT 额定功率 W	OUTPUT 输出功率 W	CURRENT 额定电流 A	SPEED 额定转速 r/min	FAN BLADE 风叶型号 mm	BRACKET 所配支架 mm	WEIGHT 重量 kg	A	B	C	D	E	LICENSE 认证
YZF 5 -13-00	220~240	50/60	33	5	0.25	1300	φ 200	H72	0.8	13	13	-	79	-	CE VDE CCC
YZF 6 -13-00	110~120	60	33	6	0.55	1550	φ 200	H72	0.8	13	13	-	79	-	UL
YZF 7 -20-00	220~240	50/60	38	7	0.30	1300	φ 230	H84	1.1	19	13	-	85	-	CE VDE CCC
YZF10-20-00	220~240	50/60	40	10	0.35	1300	φ 230	H84	1.1	19	13	-	85	-	CE VDE CCC
	110~120	60	55	10	0.80	1550									UL
YZF16-25-00	220~240	50/60	70	16	0.50	1300	φ 250	H84	1.4	25	14	-	92	-	CE VDE CCC
YZF18-25-00	110~120	60	70	18	1.01	1550									UL
YZF18-30-00	220~240	50/60	73	18	0.50	1300	φ 250	H84	1.5	30	17	-	101	-	CE VDE CCC
	110~120	60	75	18	1.10	1450									
YZF25-40-00	220~240	50/60	95	25	0.70	1300	φ 300	H109-2	1.8	40	18	-	112	-	CE VDE CCC
	110~120	60	100	25	1.40	1450									
YZF34-45-00	220~240	50/60	120	34	0.85	1300	φ 300	H109-3	2.0	45	22	-	121	-	CE VDE CCC
	110~120	60	110	34	1.50	1450									

YZF **18** Series Shaded Pole Motors

YZF **18** 系列罩极电机





MODEL 型号	VOLTAGE 额定电压 V	FREQUENCY 额定频率 Hz	INPUT 额定功率 W	OUTPUT 输出功率 W	CURRENT 额定电流 A	SPEED 额定转速 r/min	FAN BLADE 风叶型号 mm	BRACKET 所配支架 mm	WEIGHT 重量 kg	A mm	B mm	C mm	D mm	E mm	LICENSE 认证
YZF 5 -13-18	220~240	50/60	33	5	0.25	1300	φ 200	H72	0.8	13	13	44	79	-	CE VDE CCC
YZF 6 -13-18	110~120	60	33	6	0.55	1550									UL
YZF 7 -20-18	220~240	50/60	38	7	0.30	1300	φ 230	H84	1.1	19	13	44	85	-	CE VDE CCC
YZF10-20-18	220~240	50/60	40	10	0.35	1300									CE VDE CCC
	110~120	60	55	10	0.80	1550									UL
YZF16-25-18	220~240	50/60	70	16	0.50	1300	φ 250	H84	1.4	25	14	45	92	-	CE VDE CCC
YZF18-25-18	110~120	60	70	18	1.01	1550									UL

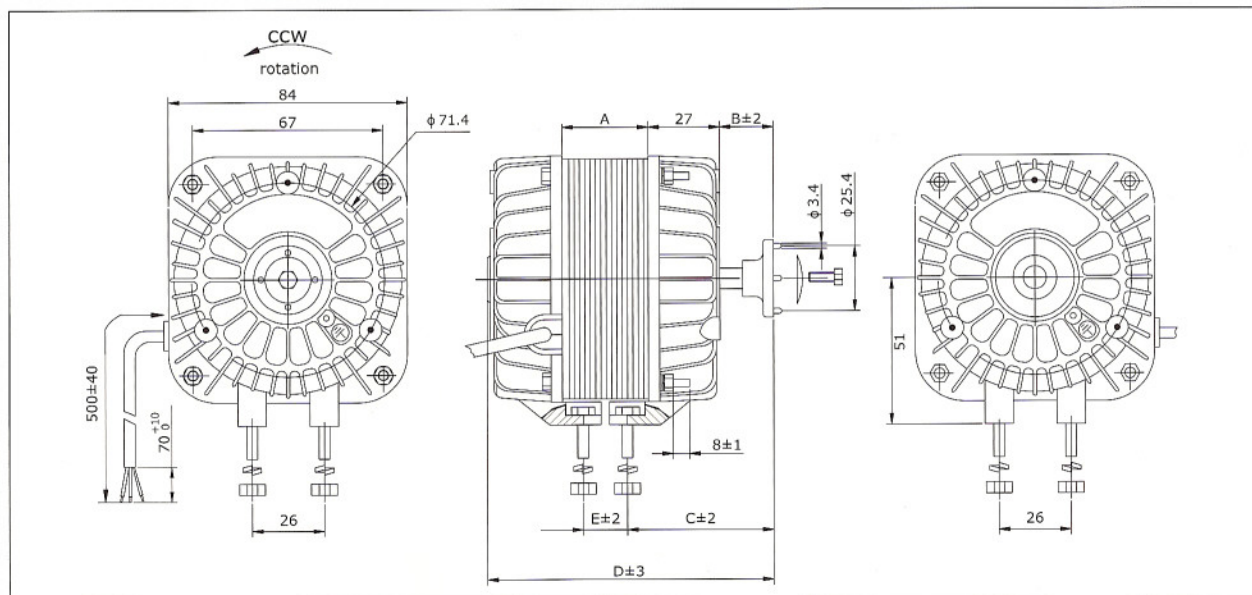YZF **26** Series Shaded Pole MotorsYZF **26** 系列罩极电机

MODEL 型号	VOLTAGE 额定电压 V	FREQUENCY 额定频率 Hz	INPUT 额定功率 W	OUTPUT 输出功率 W	CURRENT 额定电流 A	SPEED 额定转速 r/min	FAN BLADE 风叶型号 mm	BRACKET 所配支架 mm	WEIGHT 重量 kg	A mm	B mm	C mm	D mm	E mm	LICENSE 认证
YZF 5 -13-26	220~240	50/60	33	5	0.25	1300	φ 200	H72	0.8	13	13	44	79	-	CE VDE CCC
YZF 6 -13-26	110~120	60	33	6	0.55	1550									UL
YZF 7 -20-26	220~240	50/60	38	7	0.30	1300	φ 230	H84	1.1	19	13	44	85	-	CE VDE CCC
YZF10-20-26	220~240	50/60	40	10	0.35	1300									CE VDE CCC
	110~120	60	55	10	0.80	1550									UL
YZF16-25-26	220~240	50/60	70	16	0.50	1300	φ 250	H84	1.4	25	14	45	92	-	CE VDE CCC
YZF18-25-26	110~120	60	70	18	1.01	1550									UL
YZF18-30-26	220~240	50/60	73	18	0.50	1300	φ 250	H84	1.5	30	17	48	101	21	CE VDE CCC
	110~120	60	75	18	1.10	1450									
YZF25-40-26	220~240	50/60	95	25	0.70	1300	φ 300	H109-2	1.8	40	18	49	112	31	CE VDE CCC
	110~120	60	100	25	1.40	1450									
YZF34-45-26	220~240	50/60	120	34	0.85	1300	φ 300	H109-3	2.0	45	22	53	121	36	CE VDE CCC
	110~120	60	110	34	1.50	1450									

YZF 18/26 Series Shaded Pole Motors

YZF 18/26 系列罩极电机

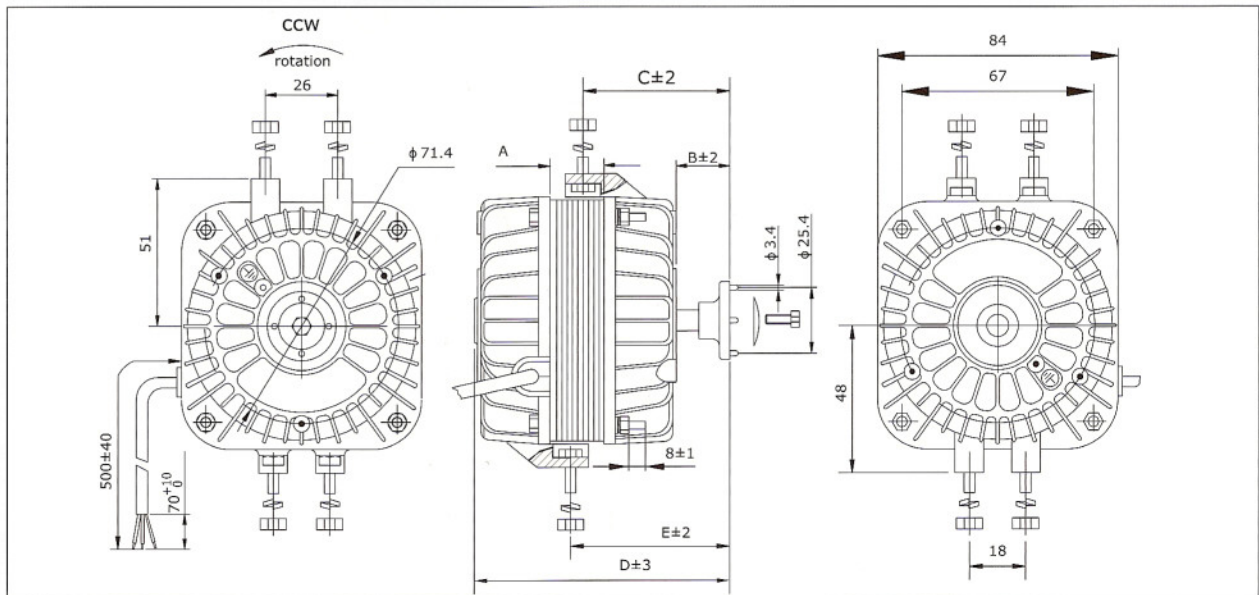

MODEL 型号	VOLTAGE 额定电压 V	FREQUENCY 额定频率 Hz	INPUT 额定功率 W	OUTPUT 输出功率 W	CURRENT 额定电流 A	SPEED 额定转速 r/min	FAN BLADE 风叶型号 mm	BRACKET 所配支架 mm	WEIGHT 重量 kg	A	B	C	D	E	LICENSE 认证
YZF 5 -13-26	220~240	50/60	33	5	0.25	1300	φ 200	H72	0.8	13	13	44	79	48	CE VDE CCC
YZF 6 -13-26	110~120	60	33	6	0.55	1550									UL
YZF 7 -20-26	220~240	50/60	38	7	0.30	1300	φ 230	H84	1.1	19	13	44	85	54	CE VDE CCC
YZF10-20-26	220~240	50/60	40	10	0.35	1300	φ 230	H84	1.1	19	13	44	85	54	CE VDE CCC
	110~120	60	55	10	0.80	1550									UL
YZF16-25-26	220~240	50/60	70	16	0.50	1300	φ 250	H84	1.4	25	14	45	92	61	CE VDE CCC
YZF18-25-26	110~120	60	70	18	1.01	1550									UL
YZF18-30-26	220~240	50/60	73	18	0.50	1300	φ 250	H84	1.5	30	17	48	101	70	CE VDE CCC
	110~120	60	75	18	1.10	1450									
YZF25-40-26	220~240	50/60	95	25	0.70	1300	φ 300	H109-2	1.8	40	18	49	112	80	CE VDE CCC
	110~120	60	100	25	1.40	1450									
YZF34-45-26	220~240	50/60	120	34	0.85	1300	φ 300	H109-3	2.0	45	22	53	121	90	CE VDE CCC
	110~120	60	110	34	1.50	1450									